




CAR Bearing manufacturing Co.,Ltd

NTN 6011LLB deep groove ball bearings

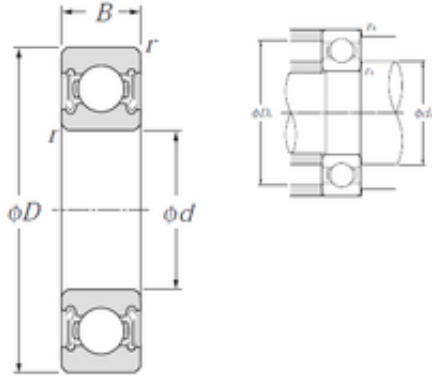

6011LLB Bearing 2D drawings and 3D CAD models

Bearing No. 6011LLB

Size	55x90x18 mm
Bore Diameter	55 mm
Outer Diameter	90 mm
Width	18 mm
d	55 mm
D	90 mm
B	18 mm
C	18 mm
r min.	1,1 mm
da min.	61,5 mm
da max	64 mm
Da max.	83,5 mm
ra max.	1 mm
Weight	0,388 Kg
Basic dynamic load rating (C)	28,3 kN
Basic static load rating (C0)	21,2 kN
(Grease) Lubrication Speed	7 700 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0
EAN	4547359003987
Product Group	B00308
Enclosure	2 Seals
Precision Class	ABEC 1 ISO P0



CAR Bearing manufacturing Co.,Ltd

Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Non-Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	55MM Bore; 90MM Outside Diameter; 18MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Other Features	Deep Groove Non-Friction Nitrile Rubber Seal Shell Alvania Prelubricated
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Weight / LBS	0.85539
Outer Race Width	0.709 Inch 18 Millimeter
Bore	2.165 Inch 55 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Outside Diameter	3.543 Inch 90 Millimeter
bore diameter:	55 mm
static load capacity:	21200 N
outside diameter:	90 mm



CAR Bearing manufacturing Co.,Ltd

precision rating:	ISO Class 0
overall width:	18 mm
finish/coating:	Uncoated
bore type:	Round
bearing material:	High Carbon Chrome Steel
closure type:	Double Sealed
cage material:	Steel
row type & fill slot:	Single Row Non-Fill Slot
inner ring width:	18 mm
snap ring included:	Without Snap Ring
outer ring width:	18 mm
internal clearance:	CN
maximum rpm (grease):	7700 rpm
operating temperature range:	-40 to 120 ° C
fillet radius:	1.1 mm
dynamic load capacity:	28300 N
manufacturer product page:	Click here